


MPC1 Series

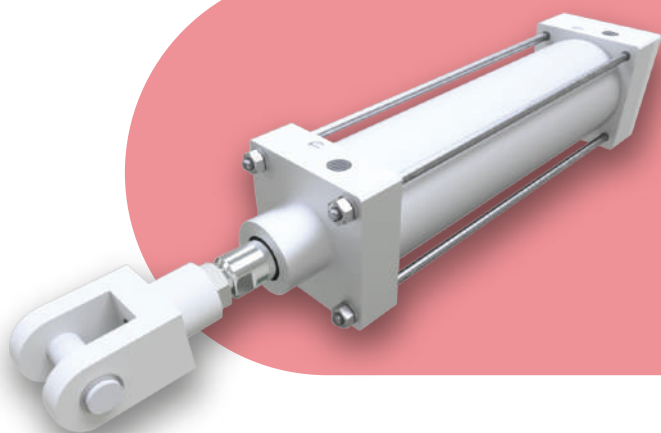

Features

- With built-in magnet. (Standard)
- With non-lubricated seal.
- Improved cushion ring and special seal increase the absorbable kinetic energy.
- Cushion needle avoid detachment.
- Custom Made Solution.

Symbol
Double Acting / Single Rod
Double Acting / Double Rod

How to Order

MPC1 - B 80 - 100

① Series

MPC1	Double acting single rod medium cylinder
MPC1W	Double acting double rod medium cylinder

② Lubrication

Nil	Standard
L	Low hydraulic pressure (≤5kgf/cm ²)
G	Low hydraulic pressure (≤25kgf/cm ²)
Q	Low friction type

③ Mounting style

B	Standard	CB	Double clevis
LB	Foot	TC	Center trunnion
FA	Rod side flange	TA	Rod side trunnion
FB	Head side flange	TB	Head side trunnion
CA	Single clevis		

④ Tube size

40	50	63	80	100
Ø40	Ø50	Ø63	Ø80	Ø100

⑤ Cylinder stroke

Bore size	Standard stroke	Max. stroke
Ø40	25, 50, 75, 100, 125, 150, 175, 200, 250, 300, 350, 400, 450, 500, 550, 600, 650, 700, 750, 800, 850, 900, 950, 1000	2950
Ø50		
Ø63		
Ø80		
Ø100		

※ Other intermediate strokes is available upon request.

※ Refer to page [1]-133, for specifications about custom-made rod ends.

⑥ Belows

	Material	Max. Temperature
Nil	Without bellows	
J	Nylon Tarpaulin	60 °C
K	Neoprene Cloth	110 °C

⑦ Rod end attachment

Nil	Rod end nut 1pc (Standard)
I	Single knuckle joint
Y	Double knuckle joint

⑧ Mounting bracket

Nil	None
KA2	Trunnion
CB2	Clevis

⑨ Auto switch

Reed A/S	Model	Solid state A/S	Model
Nil	None	Nil	None
A54	D-A54K	F59	D-F59K
A56	D-A56K	F5P	D-F5PK
A64	D-A64K	J59	D-J59K
A90(V)	D-A90(V)K	J51	D-J51K
A93(V)	D-A93(V)K	F9N	D-F9N(V)K
A96(V)	D-A96(V)K	F9P	D-F9P(V)K
		F9B	D-F9B(V)K

※ Only for auto switch attached type.

※ Refer to Auto Switch Catalogue for more information.

⑩ Number of auto switches


Nil	2 pcs
1	1 pc
N	N pcs (N: 3, 4, 5...)

※ Only for auto switch attached type.

⑪ Special order

Nil	None
TS	Multi-step stroke cylinder (Single rod)
TW	Multi-step stroke cylinder (Double rod)
TD	Tandem cylinder
ASJ	Stroke adjustable type (in forward direction within 25mm)
BSJ	Stroke adjustable type (in forward direction within 50mm)
S	Single acting spring return
T	Single acting spring extend
SV	Heat resistant cylinder
SS	Stainless steel piston rod
M	Custom Mode

※ Only for low friction type.

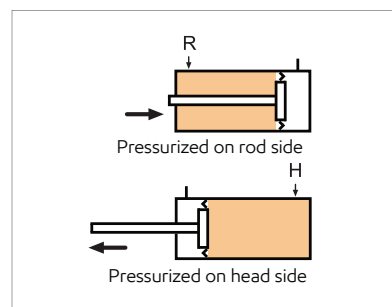

Specifications

Type	Non-lubricated		Low hydraulic pressure
Fluid	Single rod	Double rod	Turbine Oil VG32
Proof pressure	15kgf/cm ² (1.5MPa)		
Max. operating pressure	9.9kgf/cm ² (0.99MPa)		Low pressure L type: 5kgf/cm ² (0.5MPa)
Min. operating pressure	0.5kgf/cm ² (0.05MPa)		1.0kgf/cm ² (0.1MPa)
Ambient & fluid temperature	5 ~ 60 °C		
Operating piston speed	50 ~ 1000mm/sec		0.5 ~ 300mm/sec
Cushion	Both side air cushion		None
Tolerance of thread	KS class 2		
Tolerance of stroke	~250 ST : $\begin{matrix} +1.0 \\ 0 \end{matrix}$		251 ~ 800 ST : $\begin{matrix} +1.4 \\ 0 \end{matrix}$

Accessory

Mounting style	Standard	Foot	Rod Side Flange	Head Side Flange	Single clevis	Double clevis	Trunnion
Standard	Rod end nut	•	•	•	•	•	•
	Clevis pin	-	-	-	-	•	-
Option	Single knuckle joint	•	•	•	•	•	•
	Double knuckle joint	•	•	•	•	•	•
	Bellows	•	•	•	•	•	•

※ For double clevis type & double knuckle joint type, pin and snap ring are included.

Mounting Style

Mounting	Bore size	Ø40	Ø50	Ø63	Ø80	Ø100
Foot		LB40	LB50	LB63	LB80	LB100
Flange		FA/FB40	FA/FB50	FA/FB63	FA/FB80	FA/FB100
Single clevis (With pin)		CA40	CA50	CA63	CA80	CA100
Double clevis (With pin)		CB40	CB50	CB63	CB80	CB100

※ Foot mounting basically 2 pcs/set.

Rod End Attachment

Rod end attachment	Bore size	Ø40	Ø50, Ø63	Ø80	Ø100
Single knuckle joint		I40	I50/63	I80	I100
Double knuckle joint		Y40	Y50/63	Y80	Y100

Mass

Unit: kg


Bore size (mm)		Double acting single rod					Double acting double rod				
		Ø40	Ø50	Ø63	Ø80	Ø100	Ø40	Ø50	Ø63	Ø80	Ø100
Basis mass	Standard	0.790	1.134	1.408	2.636	3.536	0.904	1.277	1.580	3.003	3.956
	Foot	0.962	1.342	1.712	3.328	4.364	1.076	1.485	1.884	3.695	4.784
	Flange	0.924	1.302	1.684	3.150	4.218	1.038	1.445	1.856	3.517	4.638
	Single clevis	1.048	1.506	2.146	3.910	5.524	-	-	-	-	-
	Double clevis (with pin)	1.076	1.596	2.102	4.024	5.694	-	-	-	-	-
	Trunnion	1.150	1.614	2.208	4.186	7.206	1.264	1.757	2.380	4.553	7.626
Additional mass per each 50mm of stroke		0.168	0.212	0.268	0.456	0.604	0.252	0.277	0.347	0.662	0.906
Accessory	Single knuckle joint	0.166	0.226	0.226	0.488	0.676	-	-	-	-	-
	Double knuckle joint (with pin)	0.220	0.296	0.296	0.638	0.916	-	-	-	-	-
	Rod nut	0.016	0.032	0.032	0.048	0.116	-	-	-	-	-

Calculation:


Ex) MPC1-LB40-S100
Basis mass: 0.962(Foot Ø40) / Additional mass: 0.168/50 / Stroke: 100mm
 $0.962 + 0.168/50 \times 100 = 1.298\text{kg}$

Structure

Standard (Non Lubricated type)
MPC1 N-B

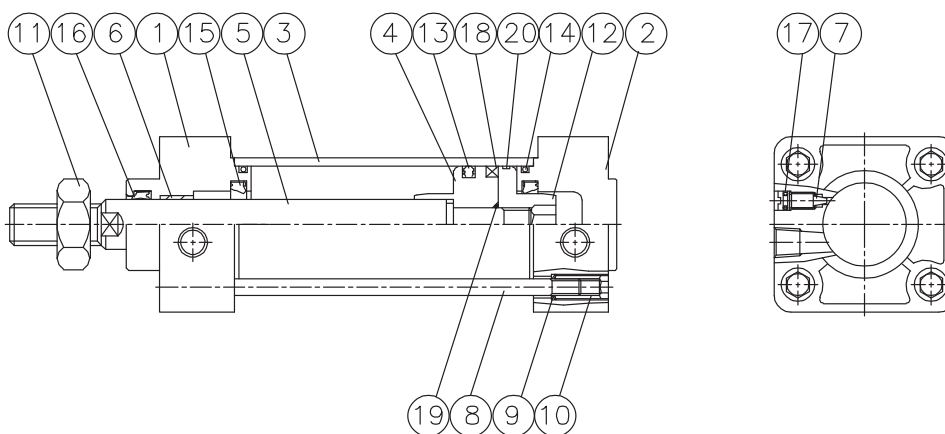

Low Hydraulic Pressure type
MPC1 L

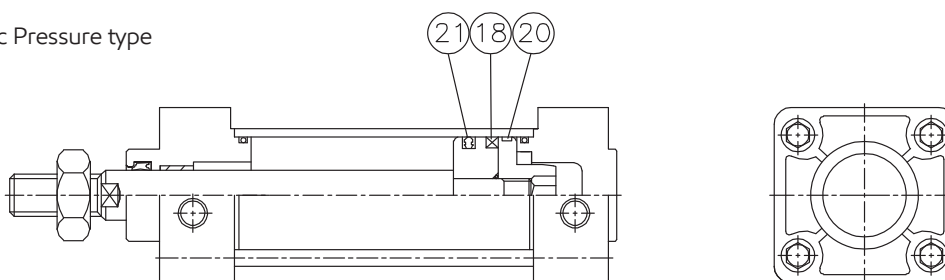


* New version cover has a longer cushion length. It is a patented model.

No.	Parts	Material	Remark
1	Rod Cover	Aluminium Alloy	-
2	Head Cover	Aluminium Alloy	-
3	Cylinder Tube	Aluminium Alloy	Hard Anodized Alluminium
4	Piston (Rod Side)	Aluminium Alloy	-
5	Rod	Carbon Steel	Hard Chromium Plating
6	Bush	Copper	-
7	Cushion Needle	Stainless Steel	-
8	Tie Rod	Carbon Steel	Zinc Plating
9	Spring Washer	HSWR	-
10	Tie Rod Nut	Carbon Steel	Zinc Plating
11	Rod End Nut	Rolled Steel	Zinc Plating
12	Piston (Head Side)	Aluminium Alloy	-

Type	No.	Parts	Material	Bore size (mm)				
				40	50	63	80	100
Non-lubricated	13	Non-lubricated packing	NBR	OPA40	OPA50	OPA63	OPA80	OPA100
	14	Tube O-ring		Ø38X1.5	Ø48X1.5	S60	S77	S97
	15	Cushion packing		KP20	KP24	KP24	KP30	KP35
	16	Rod packing		DRP16	DRP20	DRP20	DRP25	DRP30
	17	Needle O-ring		AN5	AN5	AN5	AN5	AN5
	18	Magnet		Ø40	Ø50	Ø63	Ø80	Ø100
	19	Rod O-ring		S10	S14	S14	S16	S20
Low hyd. pressure ¹⁾	20	Wearing	Resin	SWB40	SWB50	SWB63	SWB80	SWB100
	21	Low hyd. pressure packing	NBR	HSD40	HSD50	HSD63	HSD80	HSD100

※ 1) All packings are non-lubricated type except no. 21.

Dimensions-Standard (B)

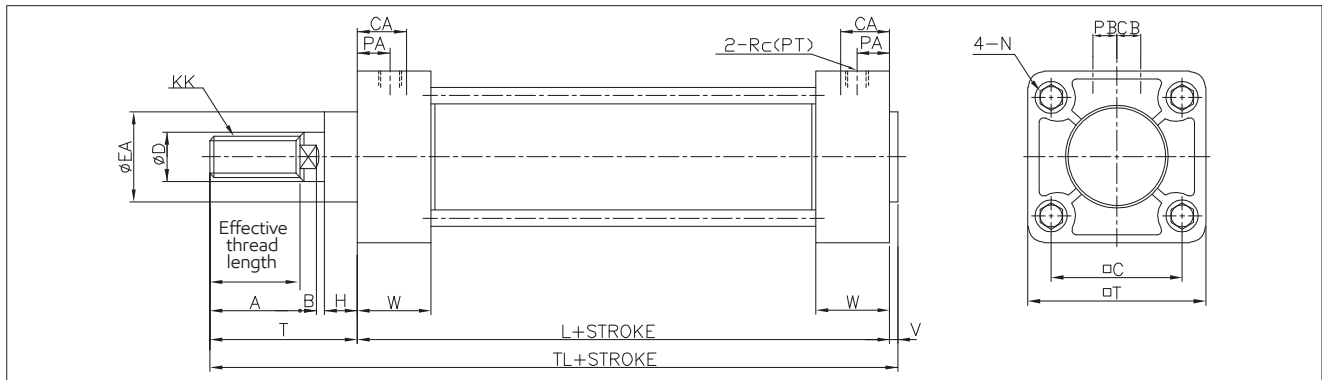


Unit : mm

Bore size	Effective thread length	A	B	□C	CA	CB	ØD	ØEA	H	KK	L	N	PA
Ø40	27	30	6	44	17.5	8.5	16	32	12	M14XP1.5	84	M8XP1.25	15.4
Ø50	32	35	7	52	19.5	11	20	40	12	M18XP1.5	90	M8XP1.25	14
Ø63	32	35	7	64	23	11	20	40	12	M18XP1.5	98	M8XP1.25	15
Ø80	37	40	11	78	24	14	25	52	17	M22XP1.5	116	M12XP1.75	17.5
Ø100	37	40	11	92	26.5	14.5	30	52	17	M26XP1.5	126	M12XP1.75	20

Bore size	PB	Rc(PT)	T	□T	TL	V	W
Ø40	6.5	1/4	51	60	138	3	26
Ø50	8	3/8	58	70	151	3	27.5
Ø63	8	3/8	58	83	159	3	29.5
Ø80	13	1/2	71	102	194	7	34
Ø100	13	1/2	72	116	205	7	36.5

Dimensions-Foot (LB)

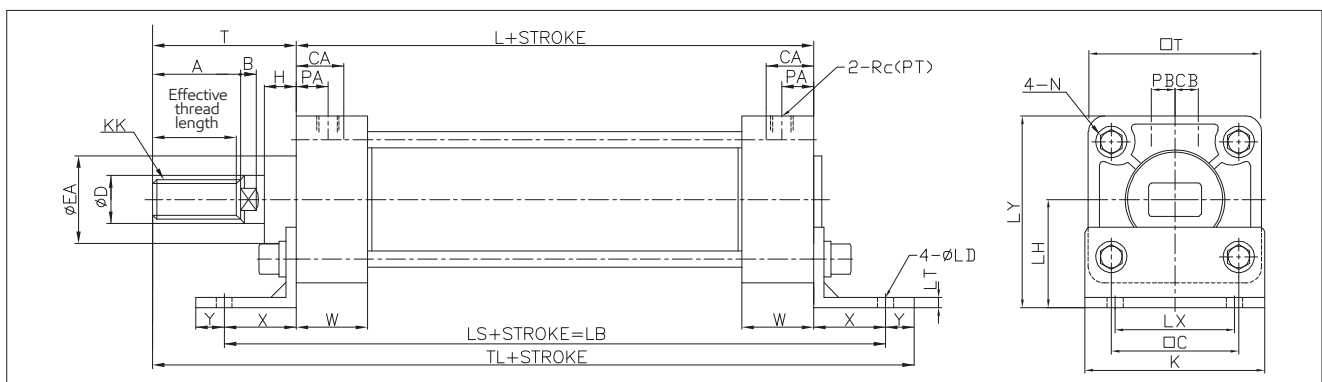


Unit : mm

Bore size	Effective thread length	A	B	□C	CA	CB	ØD	ØEA	H	K	KK	L	ØLD	LH
Ø40	27	30	6	44	17.5	8.5	16	32	12	60	M14XP1.5	84	9	40
Ø50	32	35	7	52	19.5	11	20	40	12	70	M18XP1.5	90	9	45
Ø63	32	35	7	64	23	11	20	40	12	85	M18XP1.5	98	11.5	50
Ø80	37	40	11	78	24	14	25	52	17	102	M22XP1.5	116	13.5	65
Ø100	37	40	11	92	26.5	14.5	30	52	17	116	M26XP1.5	126	13.5	75

Bore size	LS	LT	LX	LY	N	PA	PB	Rc(PT)	T	□T	TL	W	X	Y
Ø40	138	3	42	70	M8XP1.25	15.4	6.5	1/4	51	60	175	26	27	(13)
Ø50	144	3	50	80	M8XP1.25	14	8	3/8	58	70	188	27.5	27	(13)
Ø63	166	3	59	93	M8XP1.25	15	8	3/8	58	83	206	29.5	34	(16)
Ø80	204	5	76	116	M12XP1.75	17.5	13	1/2	71	102	247	34	44	(16)
Ø100	212	5	92	133	M12XP1.75	20	13	1/2	72	116	258	36.5	43	(17)

Dimensions-Rod Side Flange (FA)

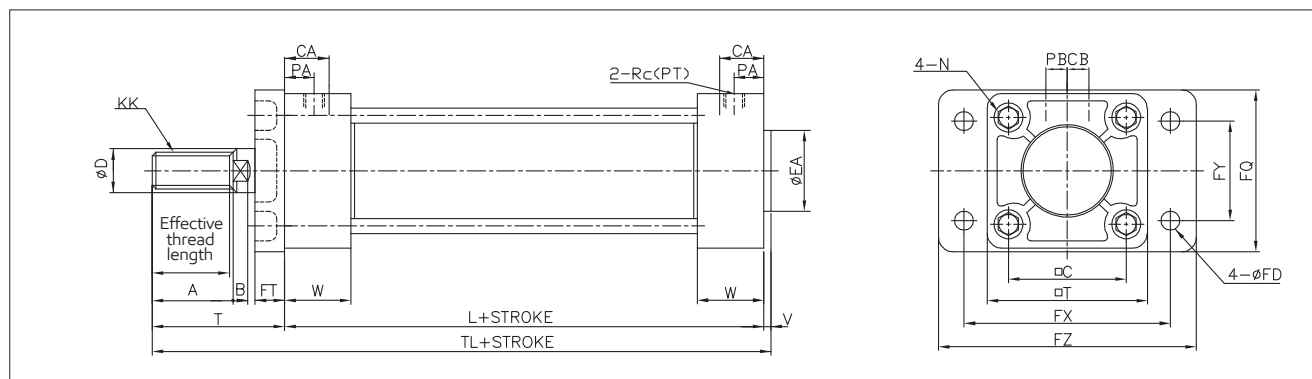


Unit : mm

Bore size	Effective thread length	A	B	$\square C$	CA	CB	$\varnothing D$	$\varnothing EA$	FD	FQ	FT	FX	FY	FZ
$\varnothing 40$	27	30	6	44	17.5	8.5	16	32	9	65	12	80	42	100
$\varnothing 50$	32	35	7	52	19.5	11	20	40	9	75	12	90	50	110
$\varnothing 63$	32	35	7	64	23	11	20	40	11.5	90	15	105	59	130
$\varnothing 80$	37	40	11	78	24	14	25	52	13.5	110	18	130	76	160
$\varnothing 100$	37	40	11	92	26.5	14.5	30	52	13.5	126	18	150	92	180

Bore size	KK	L	N	PA	PB	Rc(PT)	T	$\square T$	TL	V	W
$\varnothing 40$	M14XP1.5	84	M8XP1.25	15.4	6.5	1/4	51	60	138	3	26
$\varnothing 50$	M18XP1.5	90	M8XP1.25	14	8	3/8	58	70	151	3	27.5
$\varnothing 63$	M18XP1.5	98	M8XP1.25	15	8	3/8	58	83	159	3	29.5
$\varnothing 80$	M22XP1.5	116	M12XP1.75	17.5	13	1/2	71	102	194	7	34
$\varnothing 100$	M26XP1.5	126	M12XP1.75	20	13	1/2	72	116	205	7	36.5

Dimensions-Head Side Flange (FB)

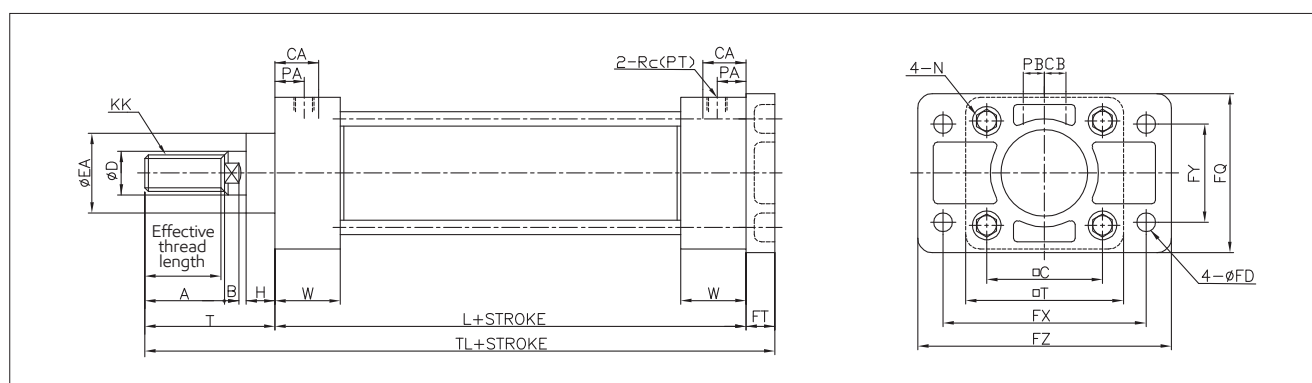


Unit : mm

Bore size	Effective thread length	A	B	$\square C$	CA	CB	$\varnothing D$	$\varnothing EA$	$\varnothing FD$	FQ	FT	FX	FY	FZ	H
$\varnothing 40$	27	30	6	44	17.5	8.5	16	32	9	65	12	80	42	100	12
$\varnothing 50$	32	35	7	52	19.5	11	20	40	9	75	12	90	50	110	12
$\varnothing 63$	32	35	7	64	23	11	20	40	11.5	90	15	105	59	130	12
$\varnothing 80$	37	40	11	78	24	14	25	52	13.5	110	18	130	76	160	17
$\varnothing 100$	37	40	11	92	26.5	14.5	30	52	13.5	126	18	150	92	180	17

Bore size	KK	L	N	PA	PB	Rc(PT)	T	$\square T$	TL	W
$\varnothing 40$	M14XP1.5	84	M8XP1.25	15.4	6.5	1/4	51	60	147	26
$\varnothing 50$	M18XP1.5	90	M8XP1.25	14	8	3/8	58	70	160	27.5
$\varnothing 63$	M18XP1.5	98	M8XP1.25	15	8	3/8	58	83	171	29.5
$\varnothing 80$	M22XP1.5	116	M12XP1.75	17.5	13	1/2	71	102	205	34
$\varnothing 100$	M26XP1.5	126	M12XP1.75	20	13	1/2	72	116	216	36.5

Dimensions-Single Clevis (CA)

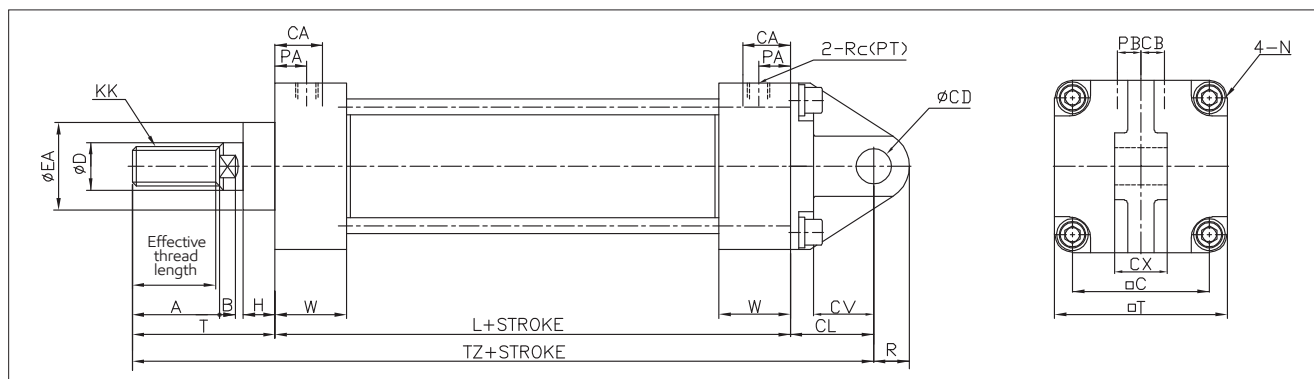


Unit : mm

Bore size	Effective thread length	A	B	□C	CA	CB	ØCD	CL	CV	CX	ØD	ØEA	H
Ø40	27	30	6	44	17.5	8.5	10 ^{+0.15} / _{+0.10}	30	18	15.0 ^{-0.1} / _{-0.3}	16	32	12
Ø50	32	35	7	52	19.5	11	12 ^{+0.15} / _{+0.10}	35	23	18.0 ^{-0.1} / _{-0.3}	20	40	12
Ø63	32	35	7	64	23	11	16 ^{+0.15} / _{+0.10}	40	27	25.0 ^{-0.1} / _{-0.3}	20	40	12
Ø80	37	40	11	78	24	14	20 ^{+0.15} / _{+0.10}	48	34	31.5 ^{-0.1} / _{-0.3}	25	52	17
Ø100	37	40	11	92	26.5	14.5	25 ^{+0.15} / _{+0.10}	58	43	35.5 ^{-0.1} / _{-0.3}	30	52	17

Bore size	KK	L	N	PA	PB	R	Rc(PT)	T	□T	TZ	W
Ø40	M14XP1.5	84	M8XP1.25	15.4	6.5	(10)	1/4	51	60	165	26
Ø50	M18XP1.5	90	M8XP1.25	14	8	(12)	3/8	58	70	183	27.5
Ø63	M18XP1.5	98	M8XP1.25	15	8	(16)	3/8	58	83	196	29.5
Ø80	M22XP1.5	116	M12XP1.75	17.5	13	(20)	1/2	71	102	235	34
Ø100	M26XP1.5	126	M12XP1.75	20	13	(25)	1/2	72	116	256	36.5

Dimensions-Double Clevis (CB)

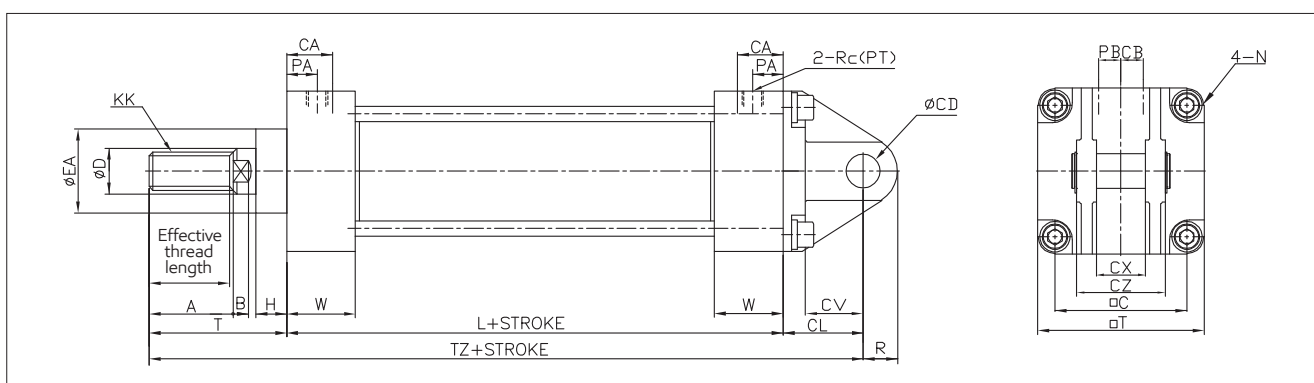


Unit : mm

Bore size	Effective thread length	A	B	□C	CA	CB	ØCD	CL	CV	CX	CZ	ØD	ØEA
Ø40	27	30	6	44	17.5	8.5	10 ^{+0.15} / _{+0.10}	30	18	15.0 ^{+0.1} / _{+0.3}	29.5	16	32
Ø50	32	35	7	52	19.5	11	12 ^{+0.15} / _{+0.10}	35	23	18.0 ^{+0.1} / _{+0.3}	38	20	40
Ø63	32	35	7	64	23	11	16 ^{+0.15} / _{+0.10}	40	27	25.0 ^{+0.1} / _{+0.3}	49	20	40
Ø80	37	40	11	78	24	14	20 ^{+0.15} / _{+0.10}	48	34	31.5 ^{+0.1} / _{+0.3}	61	25	52
Ø100	37	40	11	92	26.5	14.5	25 ^{+0.15} / _{+0.10}	58	43	35.5 ^{+0.1} / _{+0.3}	64	30	52

Bore size	H	KK	L	N	PA	PB	R	Rc(PT)	T	□T	TZ	W
Ø40	12	M14XP1.5	84	M8XP1.25	15.4	6.5	(10)	1/4	51	60	165	26
Ø50	12	M18XP1.5	90	M8XP1.25	14	8	(12)	3/8	58	70	183	27.5
Ø63	12	M18XP1.5	98	M8XP1.25	15	8	(16)	3/8	58	83	196	29.5
Ø80	17	M22XP1.5	116	M12XP1.75	17.5	13	(20)	1/2	71	102	235	34
Ø100	17	M26XP1.5	126	M12XP1.75	20	13	(25)	1/2	72	116	256	36.5

Dimensions-Center Trunnion (TC), Rod Side Trunnion (TA), Head Side Trunnion (TB)

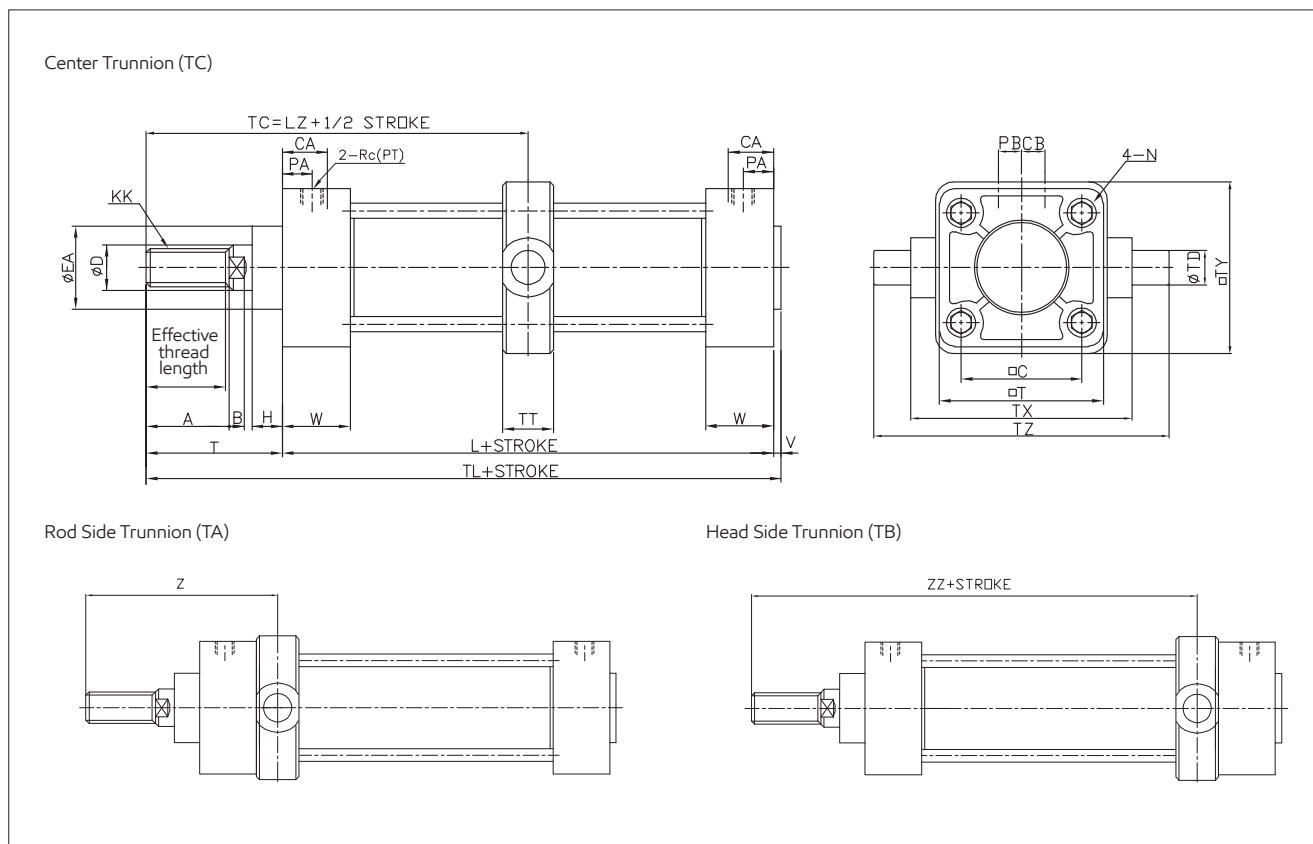


Unit: mm

Bore size	Effective thread length	A	B	$\square C$	CA	CB	ϕD	ϕEA	H	KK	L	LZ	N
$\phi 40$	27	30	6	44	17.5	8.5	16	32	12	M14XP1.5	84	93	M8XP1.25
$\phi 50$	32	35	7	52	19.5	11	20	40	12	M18XP1.5	90	103	M8XP1.25
$\phi 63$	32	35	7	64	23	11	20	40	12	M18XP1.5	98	107	M8XP1.25
$\phi 80$	37	40	11	78	24	14	25	52	17	M22XP1.5	116	129	M12XP1.75
$\phi 100$	37	40	11	92	26.5	14.5	30	52	17	M26XP1.5	126	135	M12XP1.75

Bore size	PA	PB	Rc(PT)	T	$\square T$	ϕTD	TL	TT	TX	TY	TZ	V	W	Z	ZZ
$\phi 40$	15.4	6.5	1/4	51	60	15 ^{-0.05} _{-0.10}	138	22	85	62	117	3	26	88	98
$\phi 50$	14	8	3/8	58	70	15 ^{-0.05} _{-0.10}	151	22	95	74	127	3	27.5	96.5	109.5
$\phi 63$	15	8	3/8	58	83	18 ^{-0.05} _{-0.10}	158	28	110	90	148	3	29.5	101.5	111.5
$\phi 80$	17.5	13	1/2	71	102	25 ^{-0.05} _{-0.10}	194	34	140	110	192	7	34	122	136
$\phi 100$	20	13	1/2	72	116	25 ^{-0.05} _{-0.10}	205	40	162	130	214	7	36.5	128.5	141.5

Dimensions-Trunnion Bracket (KA2)

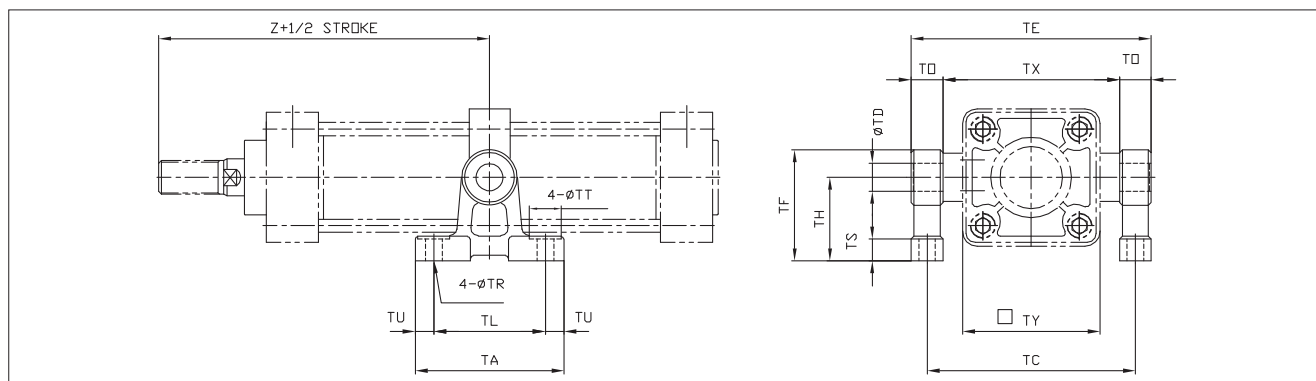


Unit : mm

Part No.	Bore size	TA	TC	TDH10 (Hole)	TE	TF	TH	TL	TO	TR	TS	TT
KA2-40/50	Ø40	80	102	15 ^{+0.070} ₀	119	60	45	60	17	9	12	17
	Ø50	80	112	15 ^{+0.070} ₀	129	60	45	60	17	9	12	17
KA2-63	Ø63	100	130	18 ^{+0.070} ₀	150	73	55	70	20	11	14	22
KA2-80/100	Ø80	120	166	25 ^{+0.084} ₀	192	100	75	90	26	13.5	17	24
	Ø100	120	188	25 ^{+0.084} ₀	214	100	75	90	26	13.5	17	24

Part No.	TU	TX	TY	Z
KA2-40/50	10	85	62	93
	10	95	74	103
KA2-63	15	110	90	107
KA2-80/100	15	140	110	129
	15	162	130	135

Dimensions-Double Clevis Bracket (CB2)

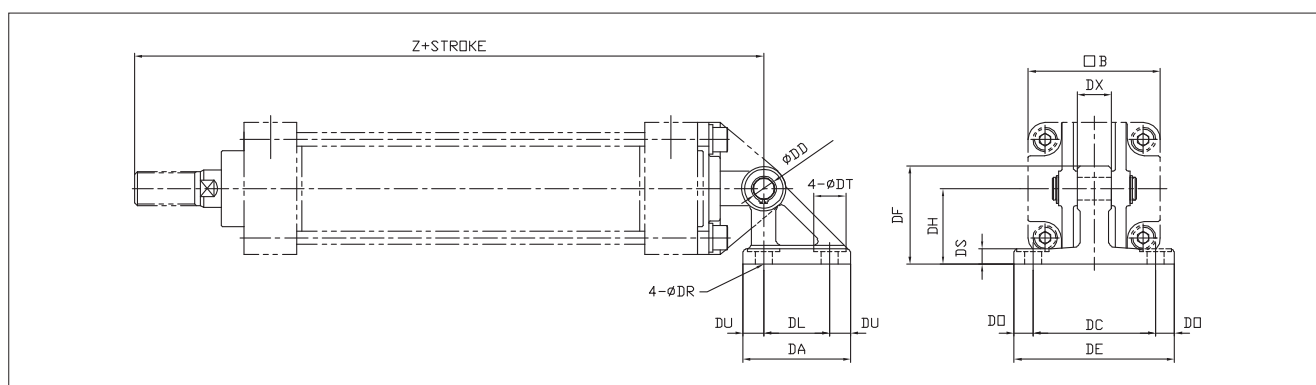


Unit : mm

Part No.	Bore size	□B	DA	DC	DDH10 (Hole)	DE	DF	DH	DL	DO	DR	DS
CB2-40	Ø40	60	57	65	10 ^{+0.058} ₀	85	52	40	35	10	9	8
CB2-50	Ø50	70	57	65	12 ^{+0.070} ₀	85	52	40	35	10	9	8
CB2-63	Ø63	85	67	80	16 ^{+0.070} ₀	105	66	50	40	12.5	11	10
CB2-80	Ø80	102	93	100	20 ^{+0.084} ₀	130	90	65	60	15	13.5	12
CB2-100	Ø100	116	93	100	25 ^{+0.084} ₀	130	90	65	60	15	13.5	12

Part No.	DT	DU	DX	Z
CB2-40	17	11	15	165
CB2-50	17	11	18	183
CB2-63	22	13.5	25	196
CB2-80	24	16.5	31.5	235
CB2-100	24	16.5	35.5	256

Rotating Angle


Bore size (mm)	A °	B °	A° + B° + 90°
Ø40~Ø100	12°	60°	162°



Dimensions- Accessory

Single Knuckle Joint

Material: Free-cutting steel

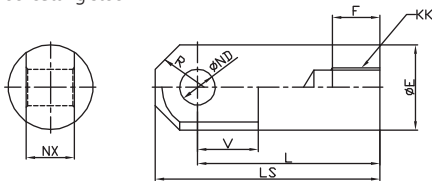


Unit : mm

Part No.	Bore size	ØE	F	KK	L	LS	ØND	NX	R	V
I40	Ø40	24	22	M14X1.5	55	69	12 ^{+0.07} ₀	16 ^{-0.1} _{-0.3}	15.5	20
I50	Ø50, 63	28	27	M18X1.5	60	74	12 ^{+0.07} ₀	16 ^{-0.1} _{-0.3}	15.5	20
I80	Ø80	36	37	M22X1.5	71	91	18 ^{+0.07} ₀	28 ^{-0.1} _{-0.3}	22.5	26
I100	Ø100	40	37	M26X1.5	83	105	20 ^{+0.08} ₀	30 ^{-0.1} _{-0.3}	24.5	28

Double Knuckle Joint

Material: FC 40

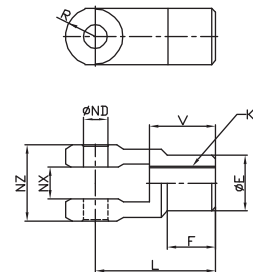


Unit : mm

Part No.	Bore size	ØE	F	KK	L	ØND	NX	NZ	R	V
Y40	Ø40	24	22	M14X1.5	55	12 ^{+0.1} ₀	16 ^{+0.3} _{+0.1}	38	15.5	30
Y50	Ø50, 63	28	24	M18X1.5	60	12 ^{+0.1} ₀	16 ^{+0.3} _{+0.1}	38	15.5	30
Y80	Ø80	36	33	M22X1.5	71	18 ^{+0.1} ₀	28 ^{+0.3} _{+0.1}	55	22.5	43
Y100	Ø100	40	34	M26X1.5	83	20 ^{+0.1} ₀	30 ^{+0.3} _{+0.1}	61	24.5	45

Rod End Nut

Material: Rolled steel

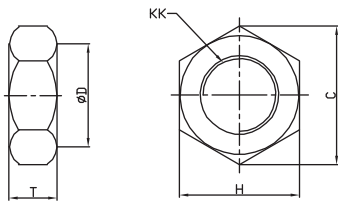


Unit : mm

Part No.	Bore size	C	ØD	H	KK	T
RN-04	Ø40	25.4	21	22	M14X1.5	8
RN-05	Ø50, 63	31.2	26	27	M18X1.5	11
RN-08	Ø80	37.0	31	32	M22X1.5	13
RN-10	Ø100	47.3	39	41	M26X1.5	16

Clevis Pin

Material: Carbon steel

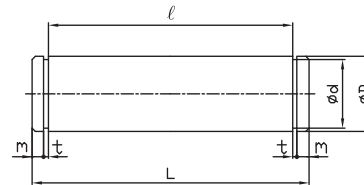


Unit : mm

Part No.	Bore size	ØDd9	Ød	L	ℓ	m	t
CP-04	Ø40	10 ^{-0.04} _{-0.09}	Ø9	35.8	29.8	1.85	1.15
CP-05	Ø50	12 ^{-0.04} _{-0.09}	Ø11	44.5	38.2	1.9	1.15
CP-06	Ø63	16 ^{-0.05} _{-0.09}	Ø14.5	55.3	49.2	1.9	1.15
CP-08	Ø80	20 ^{-0.06} _{-0.11}	Ø18.5	68.2	61.2	2.15	1.35
CP-10	Ø100	25 ^{-0.06} _{-0.11}	Ø23	71.2	64.2	2.15	1.35

Knuckle Joint Pin


Material: Carbon steel

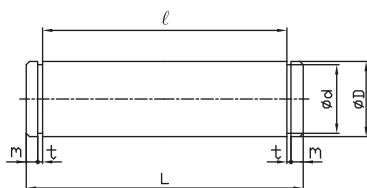

Unit : mm

Part No.	Bore size	ØDd9	Ød	L	ℓ	m	t
JP-04	Ø40, 50, 63	12 ^{-0.05} _{-0.09}	Ø11	44.5	38.2	1.85	1.13
JP-08	Ø80	18 ^{-0.05} _{-0.09}	Ø16.5	62.5	55.2	2.15	1.35
JP-10	Ø100	20 ^{-0.06} _{-0.12}	Ø18.5	68.2	61.2	2.15	1.35

Dimensions-Bellows Attached Type (J, K)

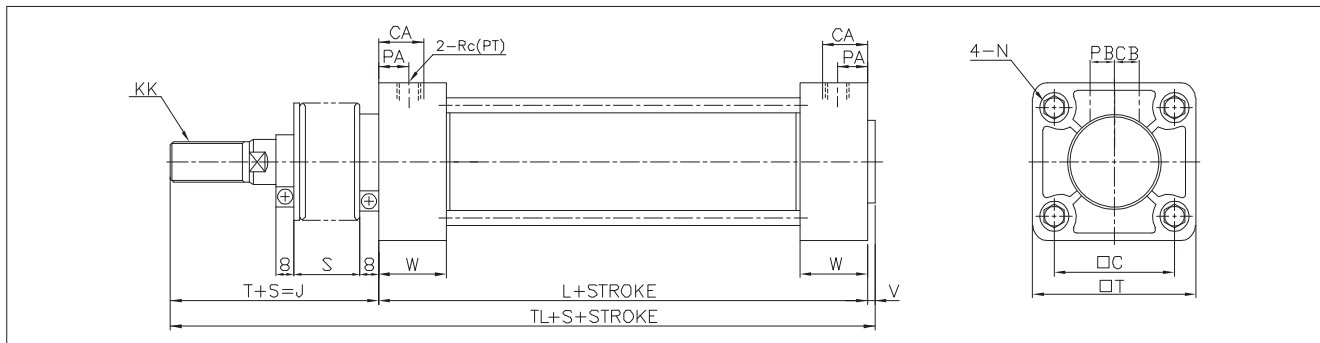

Unit : mm


Bore size	□C	CA	CB	∅EA	∅EB	KK	L	N	PA	PB	Rc(PT)	S
∅40	44	17.5	8.5	32	43	M14XP1.5	84	M8XP1.25	15.4	6.5	1/4	1/4 stroke
∅50	52	19.5	11	40	52	M18XP1.5	90	M8XP1.25	14	8	3/8	1/4 stroke
∅63	64	23	11	40	52	M18XP1.5	98	M8XP1.25	15	8	3/8	1/4 stroke
∅80	78	24	14	52	65	M22XP1.5	116	M12XP1.75	17.5	13	1/2	1/4 stroke
∅100	92	26.5	14.5	52	65	M26XP1.5	126	M12XP1.75	20	13	1/2	1/4 stroke

Bore size	T	□T	TL	V	W
∅40	59	60	146	3	26
∅50	66	70	159	3	27.5
∅63	66	83	166	3	29.5
∅80	80	102	203	7	34
∅100	81	116	214	7	36.5

Type	J	K
Material	Nylon Tarpaulin	Neoprene Cloth
Heat resistant	60°C	110°C

※ For dimensions not shown in these figures, refer to the MPC1 (Standard) type.
 ※ SUS band is mounted at bellows at delivery.

Dimensions-Double Rod (MPC1W)

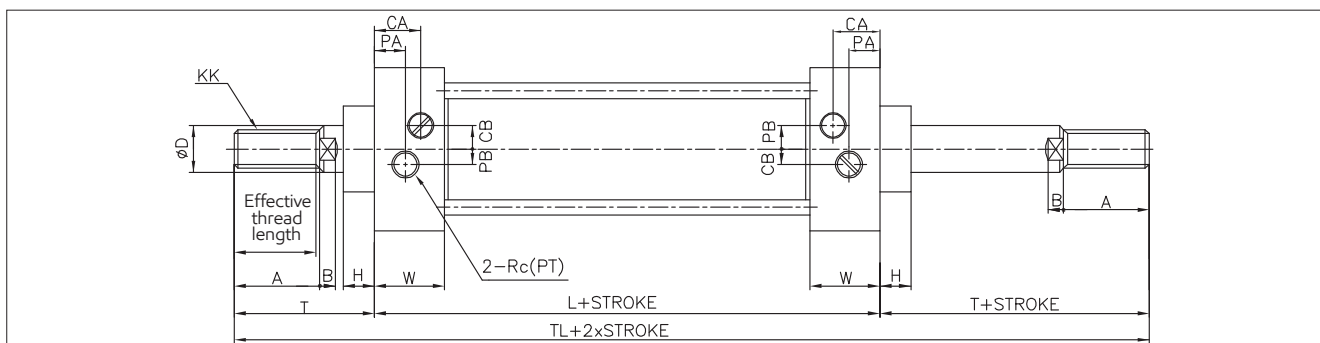

Unit : mm

Bore size	Effective thread length	A	B	CA	CB	∅D	H	KK	L	PA	PB	Rc(PT)
∅40	27	30	6	18	8	16	12	M14XP1.5	84	12.5	6.5	1/4
∅50	32	35	7	19.5	11	20	12	M18XP1.5	90	14	8	3/8
∅63	32	35	7	23	11	20	12	M18XP1.5	98	15	9	3/8
∅80	37	40	11	25	12	25	17	M22XP1.5	116	19	12	1/2
∅100	37	40	11	27.5	12	30	17	M26XP1.5	126	20	12	1/2

Bore size	T	TL	W
∅40	51	186	26.5
∅50	58	206	27.5
∅63	58	214	29.5
∅80	71	258	34
∅100	72	270	36.5


※ For dimensions not shown in these figures, refer to the MPC1 (Standard) type.

Single Rod Multi-Step Stroke Cylinder (TS)


By integrating two cylinders in series enable back and forth stroke and two-steps control for a doubled output.

Ordering notation: A Stroke + Total Stroke


Ex) 150 + 200 (A Side = 150, B Side = 50)




When B port is supplied with air pressure, A and B strokes reverse.

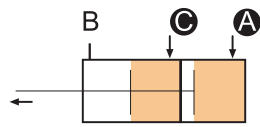

When both A and C ports are supplied with air pressure, forward output is doubled.

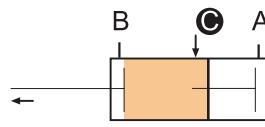


When C port is supplied with air pressure, rod and B Stroke move forward.

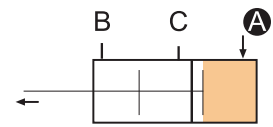

When A port is supplied with air pressure, rod and A Stroke move forward.

Dimensions-Single Rod Multi-Step Stroke Cylinder (TS)

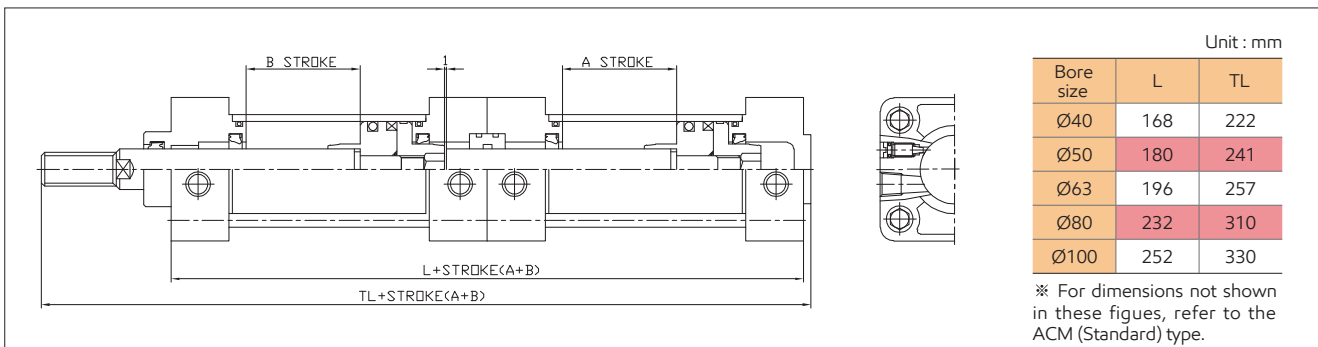


Double Rod Multi-Step Stroke Cylinder (TW)


Head side assembly. By integrating two cylinders enable back and forth stroke and three steps control.

Ordering notation: A Stroke + B Stroke


Example) 150 + 50 (A Side = 150, B Side = 50)

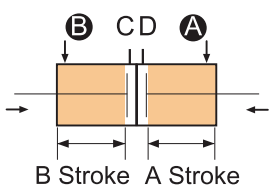


When A and B ports are supplied with air pressure, A and B strokes reverse.

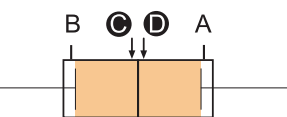

When C and D ports are supplied with air pressure, A and B strokes move forward.




When A and C ports are supplied with air pressure, B stroke move forward.

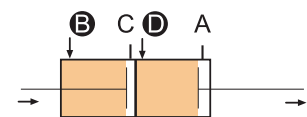


When B and D ports are supplied with air pressure, A stroke move forward.

Dimensions-Double Rod Multi-Step Stroke Cylinder (TW)

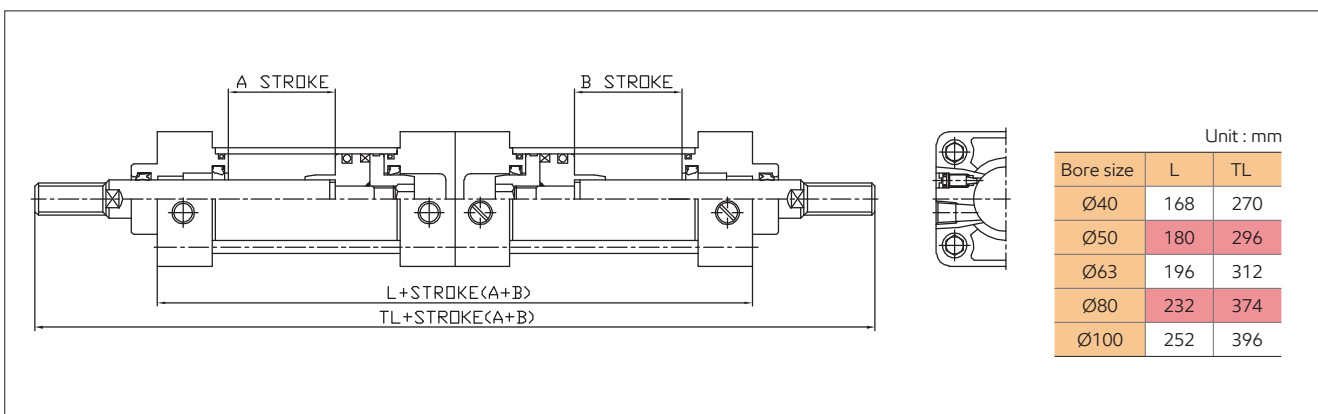


Tandem Cylinder (TD)

Two cylinders connected in series for a doubled output.




When A and B ports are supplied with air pressure, reverse operating output is doubled.




When A and C ports are supplied with air pressure, forward operating output is doubled.

Dimensions-Tandem Cylinder (TD)

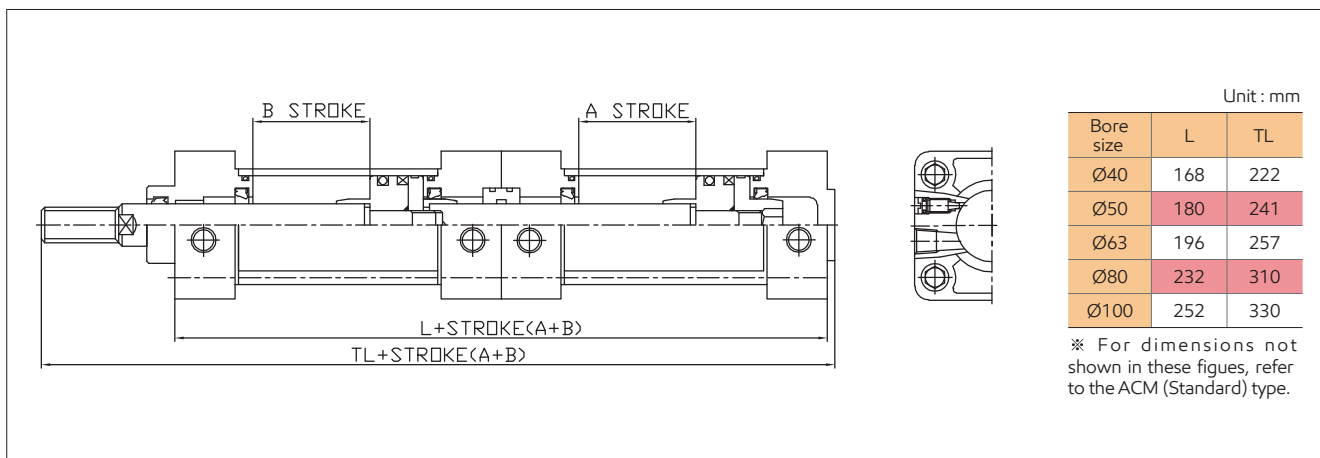


Stroke Adjustable Cylinder (ASJ, BSJ)

To adjust the entire forward stroke from 0mm to 50mm an adjustment mechanism is attached to the head side.

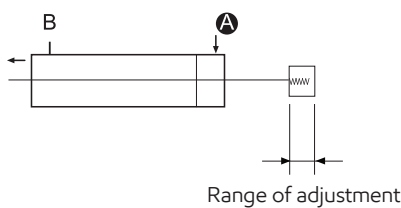

ASJ : 25mm adjustment
BSJ : 50mm adjustment
XSJ : Xmm adjustment (X is defined by user)

Dimensions-Stroke Adjustable Type (ASJ, BSJ)

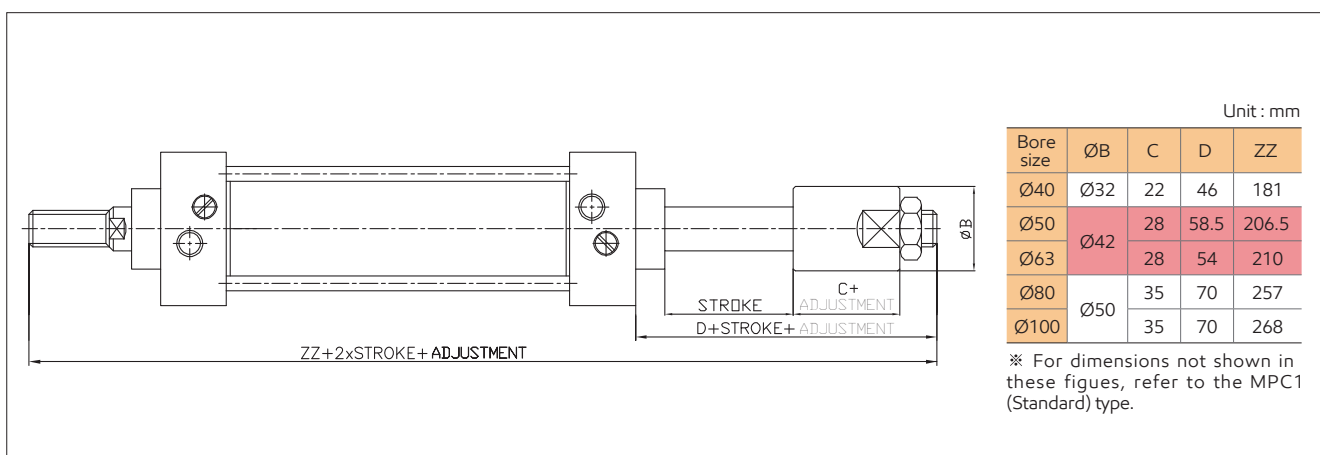


Low Friction Cylinder (Q)

Working at low pressure even when sliding resistance is low. Smooth operation is available even in low speed.


Specifications

Lubrication	No lubricated
Direction of low friction operation	Single direction (R-Air supply, H-Air supply)
Proof Pressure	10.5kgf/cm ² (1.05MPa)
Max. operating pressure	9.9kgf/cm ² (0.99MPa)
Min. operating pressure	0.02kgf/cm ² (0.002MPa)
Cushion	None
Inner leakage	Below 0.5 l/min (ANR)
Ambient temperature	-10~60°C

Sliding Resistance of Low Friction Side

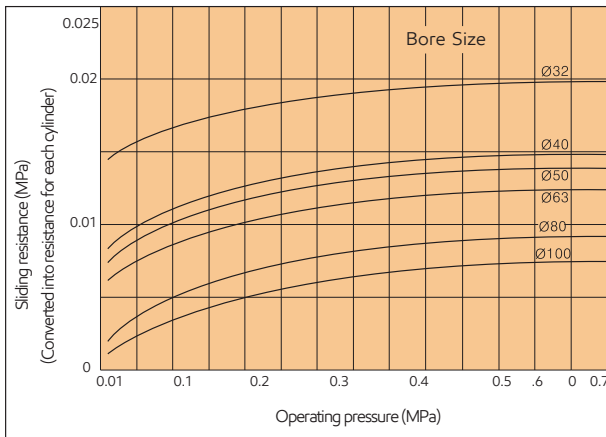

Dimensions-Low Friction Type (ACM Q)

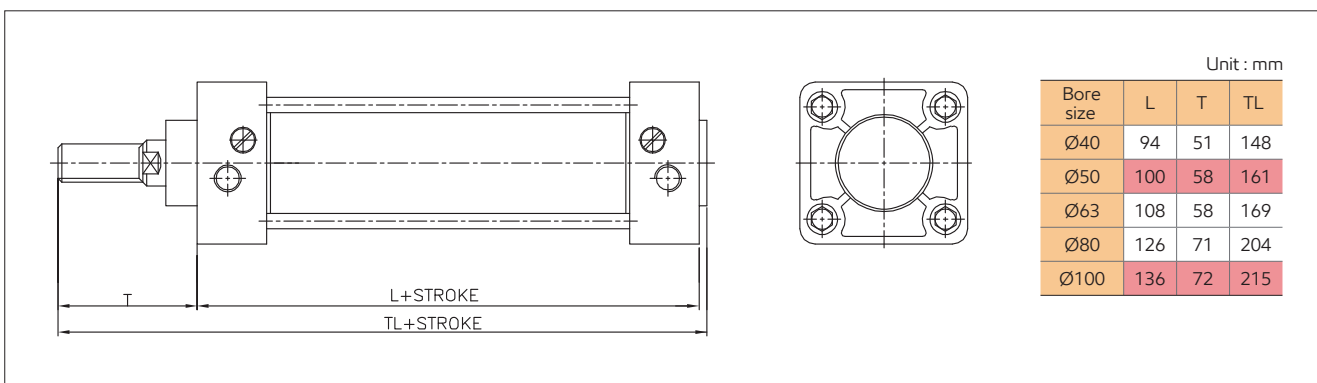

Head Resistant Cylinder (SV)

Heat resistant cylinder can be used at a high ambient temperature up to 150 °C by equipped with heat-resistant seal.

Specifications

Type	No lubricated
Bore size	Ø40, Ø50, Ø63, Ø80, Ø100
Temperature	-20~150°C
Packing Material	VITON


Stainless Steel Piston Rod (SS)

Stainless steel cylinder rod is selected to prevent the end of rod from corrosion when it is in contact with water during operation.

Specifications

Type	Lubricated, No lubricated
Bore size	Ø40, Ø50, Ø63, Ø80, Ø100
Rod Material	SUS304

Applications

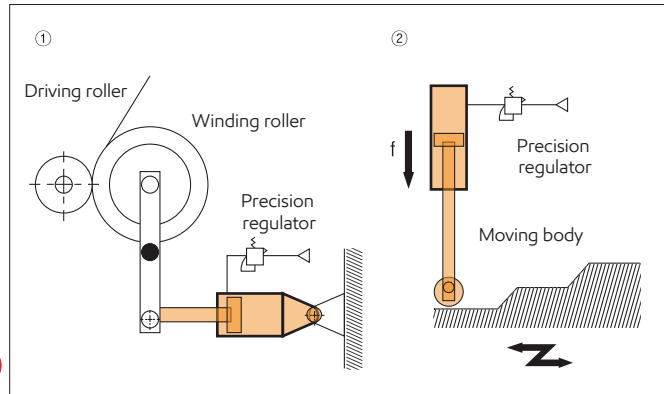

1. When used as a balancer etc., follow the example of the application mentioned earlier applying pressure at one port while leaving the other port open to atmosphere.

With pressure at rod cover port

..... Low friction side B (Example of application ①)

With pressure at head cover port

..... Low friction side F (Example of application ②)

2. In both cases, as long as the outside pressure moves the piston rod, low friction can result in the direction of extension and retraction.